


model 1442EP butt fusion machine

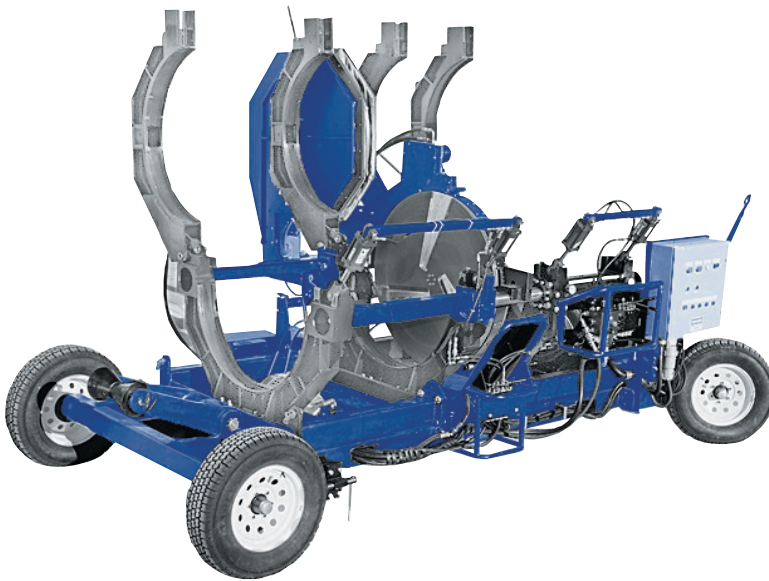

description

Sized to make short work of 36" pipe, the fully hydraulic 1442EP butt fusion machine fuses the largest pipe sizes with ease. Its centerline fusion force handles 14" through 42" polyethylene pipe sizes of IPS, metric and DIPS as well as polyvalves, flanges and mitered elbows. The unit's heater and hydraulic facer pivot away from the cart index assembly, and the quick disconnect design of the 1442EP's hydraulic hoses allows removal of the clamping unit from the cart in confined conditions. Easy to learn and operate, the 1442EP's centralized controls simplify operations and are in easy reach. Expect low maintenance costs and a rapid return on your investment in the 1442EP.

features

- ★ Centerline fusion force provides even loading around the circumference of the pipe ends for symmetrical bead formation.
- ★ Accommodates 14 inch through 42 inch and 350 through 1000 mm pipe sizes.
- ★ Miter joint capability handles up to 36 inch DIPS sizes.
- ★ Modular design cart with steering wheels comes standard and delivers excellent field maneuverability.
- ★ Protected, consolidated hydraulic controls with automatic pipe drag compensation and pressure adjustment.
- ★ Hydraulic facer.
- ★ 24,000-watt heater assembly with removable heating plate covers for quick in-field replacement.
- ★ Heating element is proportionally controlled for accurate heating temperature.
- ★ Joystick heater, facer index and position control.
- ★ Ported for DataConnect or other competitive data recorders.
- ★ Pipe lifter on cart at each end.
- ★ A superior piece of equipment at an extraordinary price.
- ★ Limited three-year warranty.

options/accessories

Ditch kit for three and four-clamp jaw in-ditch capability.

We offer a complete range of accessories for the 1442EP. Ask about reducing and mitered inserts, (available in IPS, DIPS and metric), stub end holder, and pipe stands.

specifications

carriage unit dimensions

| | | |
|--------|---------------|----------|
| Length | 120.00 inches | 3,048 mm |
| Width | 56.00 inches | 1,442 mm |
| Height | 67 inches | 1,702 mm |
| Weight | 2,250 pounds | 1,021 kg |

carriage mounted on frame

| | | |
|--------------------------------------|---------------|----------|
| Length | 206.00 inches | 5,232 mm |
| Width | 93.00 inches | 2,362 mm |
| Height | 91.00 inches | 2,311 mm |
| Total Weight (all components) | 9,650 pounds | 4,377 kg |

capacities

model 1442EP 14 inch IPS thru 42 inch IPS*

electrical data

Power Requirements: The 1442EP requires a 208 VAC Three Phase Y configuration. (208 Vac leg to leg, 120 VAC leg to ground). The machine draws approximately 100 amps, therefore the power supply should be rated for at least 125 amps. A male Appleton connector (ACP1034CD) is supplied on the power cord.

| | Volts | Watts | Amps |
|--------------------------------|----------------------|--------|--------------|
| Heater | 208 VAC Three Phase | 24,000 | approx. 67 |
| Electric Hydraulic Pump Motor | 208 VAC Three Phase | 5,470 | approx. 27 |
| Hydraulic Oil Cooler | 208 VAC Single Phase | 368 | approx. 1.7 |
| Total Power Consumption | 208 VAC Three Phase | 29,838 | approx. 95.7 |

*with the use of optional reducing inserts

*Specifications are subject to change without notice.